

STRYKER PRO 380

The Stryker PRO 380 inflatable boat comes with the added protection of 1.8mm wrapped with our Stryker Shield® under the entire bottom of the boat. There is no other comparable boat on the market today. We add a 20" transom for the ability to add a JET outboard for extreme shallow water use. Please note: this model requires a 20" prop motor. This is the perfect inflatable boat for 4 adventure seekers paired with a 20HP long shaft outboard or a 25HP JET.


SPECIFICATIONS

SIZE

| | |
|---------------------|-----------------|
| ○ Overall Length | 380cm or 12' 5" |
| ○ Inside Length | 260cm or 8' 5" |
| ○ Overall Width | 172cm or 5' 6" |
| ○ Inside Width | 80cm or 2' 6" |
| ○ Weight | 241 lbs |
| ○ Tube Diameter | 46cm or 1' 5" |
| ○ # of Air Chambers | 6 |
| ○ PVC Thickness | 1.8mm & .9mm |

CAPACITY

| | |
|---------------------|-------------------|
| ○ Max Load | 1025kg or 2259lbs |
| ○ Max # people | 8 |
| ○ Max Motor | 30 HP |
| ○ Max Motor Weight | 119kg or 262 lbs |
| ○ Transom Height | 20" |
| ○ Max Tube Pressure | 3.6 psi |

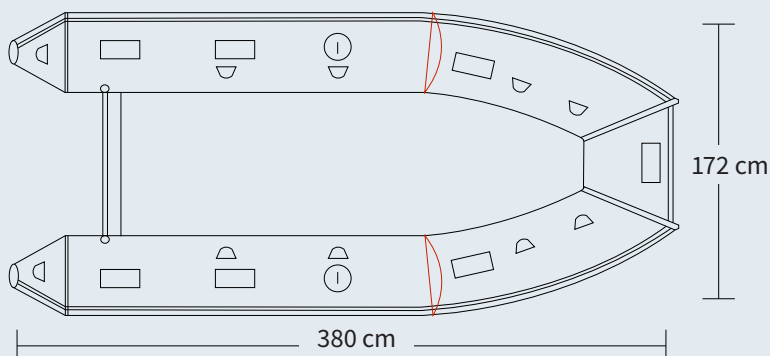



FEATURES

- ☐ Entirely Thermowelded Seams
- ☐ Aluminum Transom
- ☐ 1.8mm Underbelly
- ☐ 1.8mm Protective Seat Patches
- ☐ Stryker Shield™ Keel Strake
- ☐ Stryker Shield™ Under Tubes
- ☐ 7 x Scotty Mount Pads
- ☐ Anti Over-Inflation Safety Valve
- ☐ Reinforced Tube to Transom
- ☐ Complete Peripheral Life Line
- ☐ Exterior Water Redirecting Strake
- ☐ D Handle @ Bow
- ☐ Tow Rope
- ☐ 2 Tow Rings
- ☐ Oar Locks
- ☐ Oar Holders
- ☐ One Way Drain Valve
- ☐ 6 Carry Handles
- ☐ 10 Interior D Rings
- ☐ Aluminum Engine Mounting Plate
- ☐ Gas Tank Pad & Belt
- ☐ Bimini Mounts & D-Rings

INCLUDED IN BOX

- 2 x Aluminum Bench Seat
- 2 x Scotty Baitcaster Rod Holders
- Bimini
- Bow Bag
- Seat Bag
- Aluminum Oars
- Boat Bag
- Floor Bag
- Essentials Bags
- Foot Pump
- Repair Kit

1.844.322.BOAT (2628) • STRYKERBOATS.COM